




SYSTEM SPOP023

Report No.	Fire rating level	Rw	Thickness
Marshall Day - Da002	-/120/120	63	394mm



System Composition

- 16mm fire rated plasterboard
- Z stud
- 100mmx 20kg/m³ glasswool insulation
- 300mm gap
- Z stud
- 78mm Speedpanel® 600kg/m³ (up to 6m)
- 78mm Speedpanel® 435kg/m³ (over 6m)

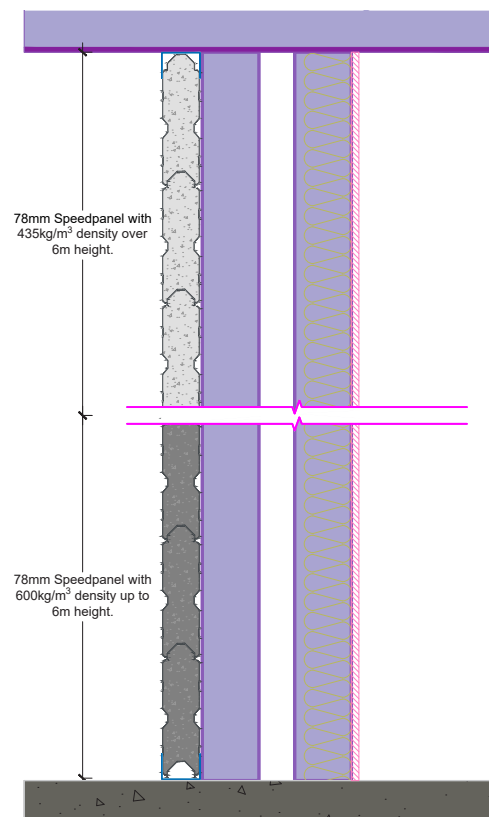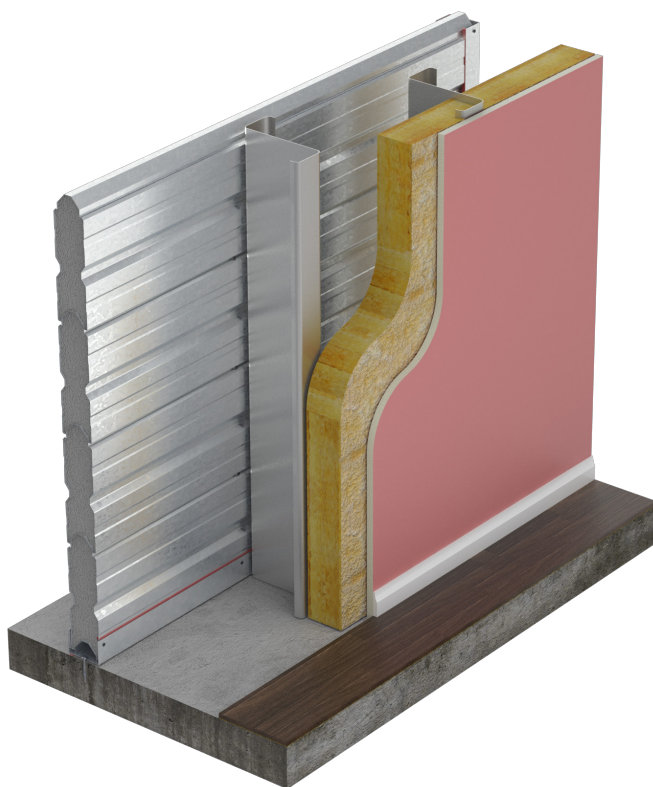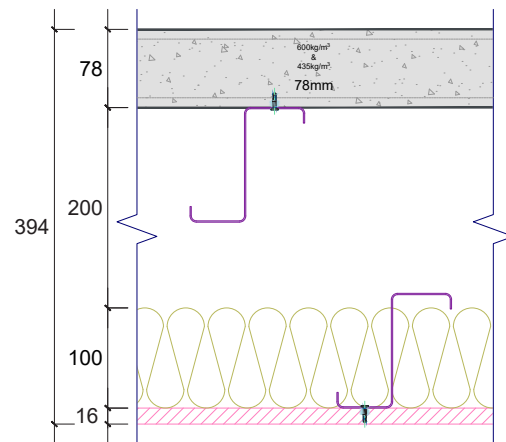

*Fire-rating from Speedpanel® direction only, unless supporting structure treated to achieve FRL 120/120/120,